


What are Plastic Deck Rails?

Bolster Deck Rail or Plastic Deck Rail are a 750 mm long continuous spacer for formwork applications. In addition to providing minimal exposure, these plastic deck rails are stable and are highly capable of spreading the load as compared to individual spacers.

In addition to the sets of vertical legs at 75mm centers, the centrally positioned support legs provide the deck rail with the stability and strength required on construction sites.

Another key design feature is that the male and female connections at either end of the plastic deck rail allow the user to connect multiple deck rails to any given length.

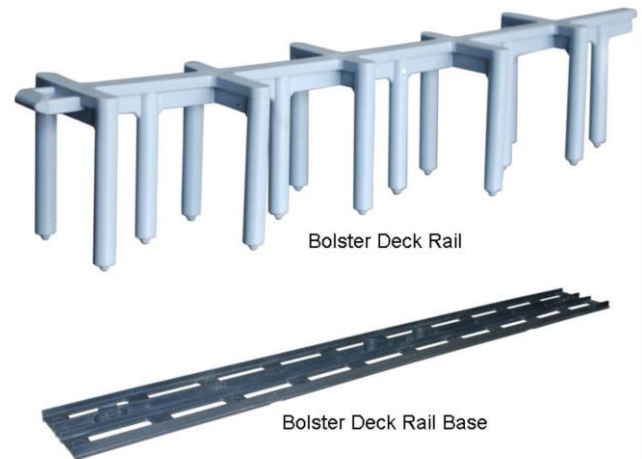

Features

- Strong, sturdy & stable design
- Male & Female connection for fast assembly on-site
- Available in many sizes
- Deck Rail base for slab-on-ground applications is available separately
- Complies with AS/NZS 2425:2015 with a 120 kg rating

Areas of Application

- Suspended decks
- Precast or Tilt-up panels
- In situ and precast beams
- Slabs on blinding concrete

| Part Number | Cover (mm) | Length (mm) | Material | Min Bar Size (mm) | Max Bar Size (mm) | Reo Type | Strength Rating (kg) | Style | Pack Size |
|-------------|------------|-------------|----------|-------------------|-------------------|-----------|----------------------|------------|-----------|
| 33BDR.025 | 25 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.030 | 30 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.035 | 35 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.040 | 40 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.045 | 45 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.050 | 50 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.055 | 55 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.060 | 60 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.065 | 65 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.070 | 70 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.075 | 75 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.080 | 80 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.085 | 85 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.090 | 90 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.095 | 95 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.100 | 100 | 750 | Plastic | Any | Any | Bar; Mesh | 120 | Continuous | 50 |
| 33BDR.BASE | | 750 | Plastic | Any | Any | Base | | Continuous | 50 |



Bolster Deck Rail

Plastic Bar Chair

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by Conac are based upon records, tests, or experience that Conac believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any Conac or third party intellectual property rights is granted or implied with this information. Product Selection and Use: Many factors beyond Conac's control and uniquely within user's knowledge and control can affect the use and performance of an Conac product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., AS, Work Safe etc.). Failure to properly evaluate, select, and use an Conac product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property. Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable Conac product packaging or product literature (in which case such warranty governs), Conac warrants that each Conac product meets the applicable Conac product specification at the time Conac ships the product. Conac MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a Conac product does not conform to this warranty, then the sole and exclusive remedy is, at Conac's option, replacement of the Conac product or refund of the purchase price. Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, Conac will not be liable for any loss or damage arising from or related to the Conac product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.